

**PRODUCT DATA SHEET****Appearance & Shape:** To be free from any defect such as flow, burrs, unevenness etc; as per IEC standards**Effective parameters irrespective of material grade (per piece)**

Parameter	Value	Unit
Effective Length (L_e)	54.15	mm
Effective Area (A_e)	32.97	mm ²
Effective Area (A_{Min})	32.97	mm ²
Effective Volume (V_e)	1785	mm ³
Approx. Weight (without gap)	8.95	g/piece

**T2208 Coated (Green)****Test Conditions:** 10kHz/150mV/CFR COIL,N=01/ L_0 =Zero/25°C


Material Grade	Initial Permeability (μ_{iac})	AL Value (nH)	D. Strength (kV)	Ordering code
CF195	5000 \pm 20%	3800 +30%/-20%	\geq 2.0	CF195 T2208 C
CF190	6000 \pm 20%	4590 +30%/-20%	\geq 2.0	CF190 T2208 C
CF197	7000 \pm 20%	5350 +30%/-20%	\geq 2.0	CF197 T2208 C
CF199	9000 \pm 20%	6900 +30%/-30%	\geq 2.0	CF199 T2208 C

Dimensions Un-Coated Core (in mm)

Dimension	Nominal	Maximum	Minimum
A	22.1	22.5	21.7
B	13.7	14.0	13.4
C	8.0	8.3	7.7

Dimensions Coated Core (in mm)

Dimension	Nominal	Maximum	Minimum
A	-	23.1	-
B	-	-	12.8
C	-	8.9	-

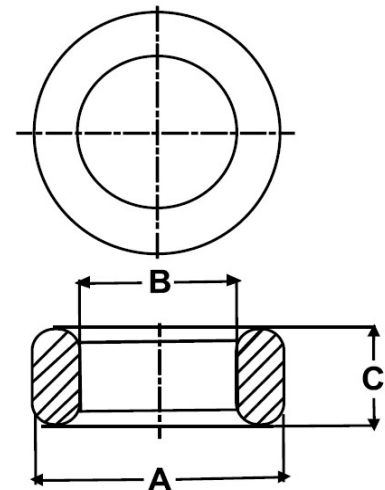

- Ferrite material for the product is in compliance with RoHS directive 2011/65/EU
- Epoxy Coating is UL Approved, UL file number E483791
- Coating material for the product is in compliance with RoHS directive 2011/65/EU

For general terms and conditions please visit

http://www.cosmoferrites.com/Downloads/Downloads/bcb70e7c-ae33-40ec-a881-0d5120db57b6_GTC.pdf**Regd. Office & Works: Jabli, Distt. Solan, Himachal Pradesh – 173 209 (India)****E-mail: sales@cosmoferrites.com**